



Specification.	单位	CXMG-150
Locking force	kN	1500
Die Stroke	mm	380
Size of Die Platen (V×H)	mm	
Space between Tie bars(V×H)	mm	460×460
Max.-Min.Die Hight	mm	500/200
Tie bar Diameter	mm	
Ejector Force	kN	87
Ejector Stroke	mm	90
Injectorion Force	kN	83
Injection Stroke	mm	200
Injection Plunger Diameter	mm	Φ60/Φ65
Nozzle Touch Force	kN	72
Nozzle Touch Stroke	kN	250
Casting Pressure	MPa	29.7
Castable Area	cm ²	496
Maximum Shot Weight	g	610
Working Pressure	MPa	10.5
Electric Motor	kw	18.5
Electric Power	kVA	27.5
Melting Pot Capacity	kg	250
Oil Tank Capacity	L	
weight of Machine	ton	8.5


CXMG-600

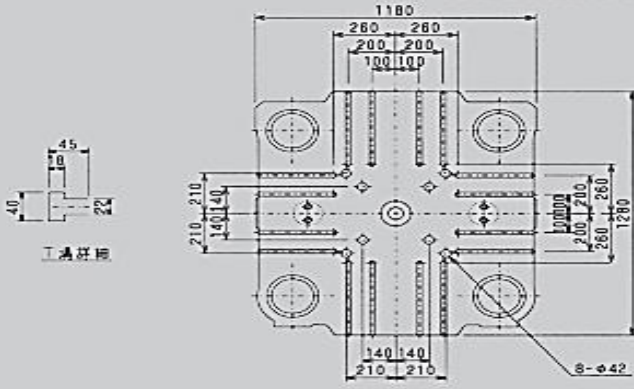

可動盤 MOVABLE PLATEN

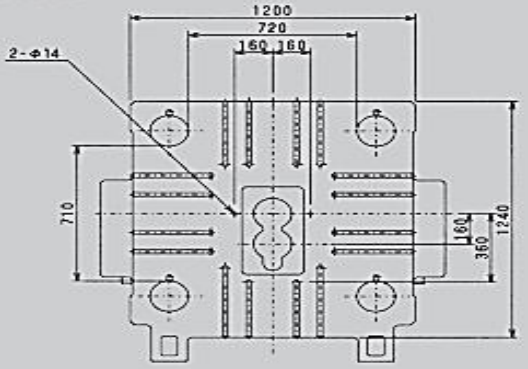

固定盤 FIXED PLATEN

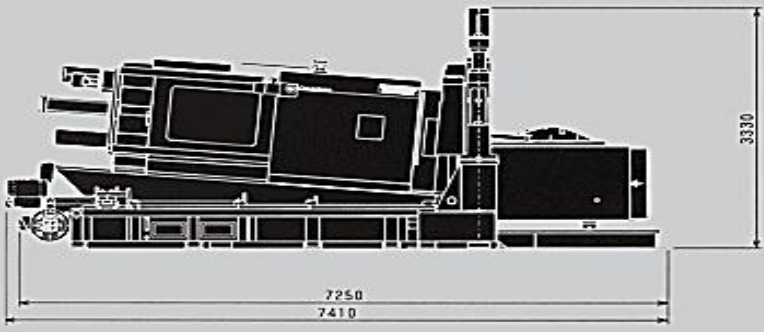

CXMG-60/150/250/350 (mm)

	CXMG-60	CXMG-150	CXMG-250	CXMG-350
[1]	488	720	870	950
[2]	330	460	530	600
[3]	65	100	125	150
[4]	58	85	110	125
[5]	4500	5000	5400	6675
[6]	2000	2550	2550	2570
[7]	2350	2520	2780	3100

