



Specification.	单位	CXMG-350
Locking force	kN	3500
Die Stroke	mm	500
Size of Die Platen (V×H)	mm	950×950
Space between Tie bars(V×H)	mm	600×600
Max.-Min.Die Hight	mm	700/300
Tie bar Diameter	mm	Φ125
Ejector Force	kN	190
Ejector Stroke	mm	120
Injectorion Force	kN	165
Injection Stroke	mm	230
Injection Plunger Diameter	mm	Φ80/Φ90
Nozzle Touch Force	kN	89
Nozzle Touch Stroke	kN	400
Casting Pressure	MPa	32.8
Castable Area	cm <sup>2</sup>	1067
Maximum Shot Weight	g	1200
Working Pressure	MPa	14
Electric Motor	kw	22
Electric Power	kVA	35
Melting Pot Capacity	kg	500
Oil Tank Capacity	L	
weight of Machine	ton	16



# CXMG-600

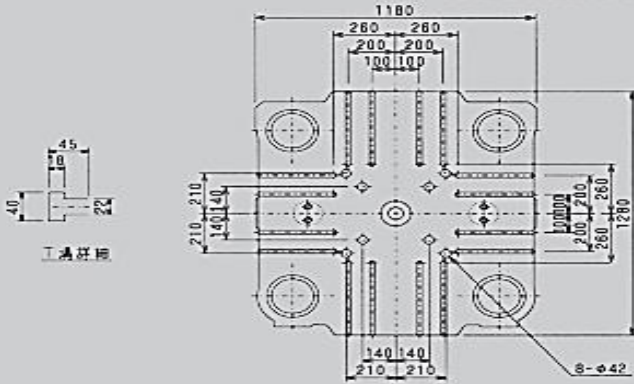

可動盤 MOVABLE PLATEN

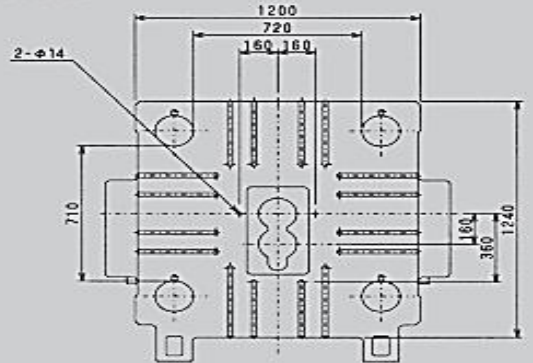

固定盤 FIXED PLATEN

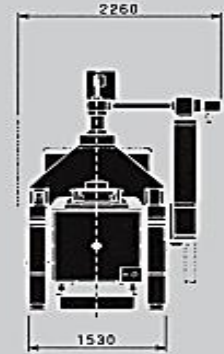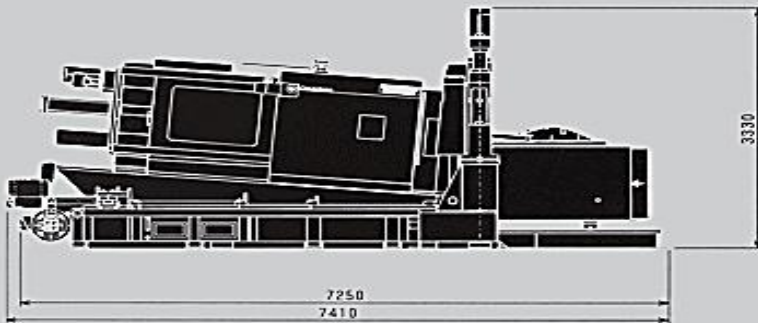

## CXMG-60/150/250/350 (mm)

	CXMG-60	CXMG-150	CXMG-250	CXMG-350
[1]	488	720	870	950
[2]	330	460	530	600
[3]	65	100	125	150
[4]	58	85	110	125
[5]	4500	5000	5400	6675
[6]	2000	2550	2550	2570
[7]	2350	2520	2780	3100

