



Specification.	单位	CXMG-600
Locking force	kN	6000 ( 最大6500 )
Die Stroke	mm	644
Size of Die Platen ( V×H )	mm	1200×1240
Space between Tie bars(V×H)	mm	710×710
Max.-Min.Die Hight	mm	800/350
Tie bar Diameter	mm	Φ160
Ejector Force	kN	285
Ejector Stroke	mm	160
Injectorion Force	kN	208
Injection Stroke	mm	230
Injection Plunger Diameter	mm	Φ80/Φ90/Φ100
Nozzle Touch Force	kN	51.4/最大72
Nozzle Touch Stroke	kN	550
Casting Pressure	MPa	41.5/32.8/26.6
Castable Area	cm <sup>2</sup>	2259
Maximum Shot Weight	g	1480
Working Pressure	MPa	14
Electric Motor	kw	
Electric Power	kVA	62
Melting Pot Capacity	kg	870
Oil Tank Capacity	L	700
weight of Machine	ton	28



# CXMG-600

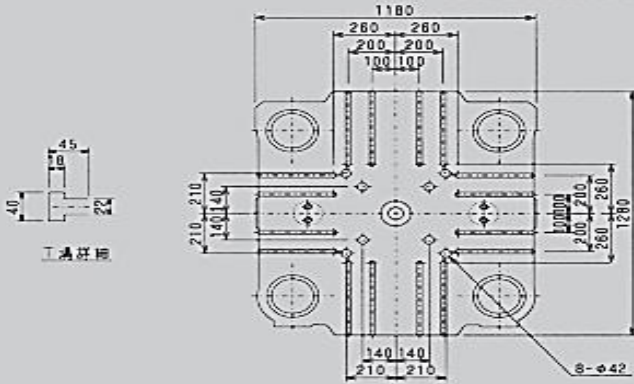

可動盤 MOVABLE PLATEN

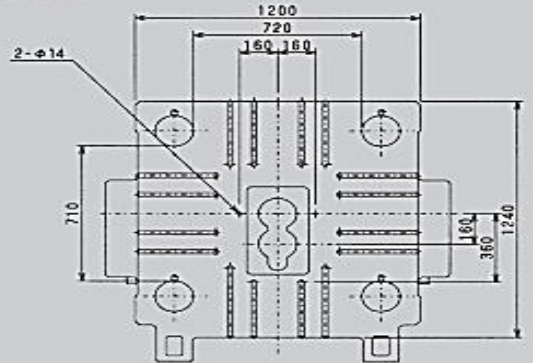

固定盤 FIXED PLATEN

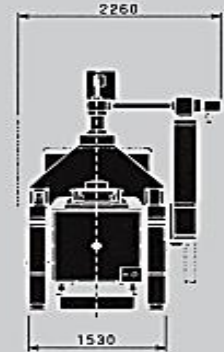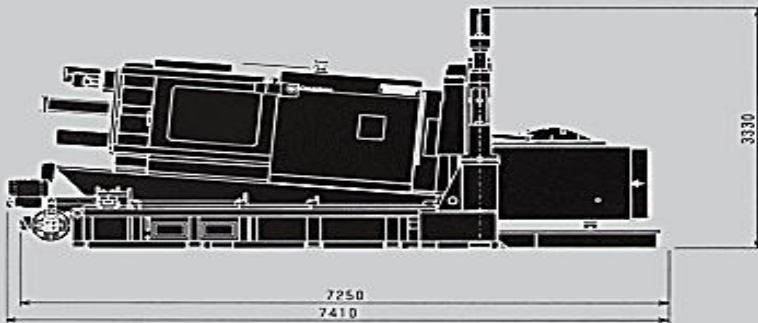

## CXMG-60/150/250/350 (mm)

	CXMG-60	CXMG-150	CXMG-250	CXMG-350
[1]	488	720	870	950
[2]	330	460	530	600
[3]	65	100	125	150
[4]	58	85	110	125
[5]	4500	5000	5400	6675
[6]	2000	2550	2550	2570
[7]	2350	2520	2780	3100

