



仕 樣	單 位	CXMG-600
合模力	kN	6000 (最大6500)
動模行程	mm	644
裝模板尺寸 (豎×橫)	mm	1200×1240
連接柱內尺寸 (豎×橫)	mm	710×710
模具最大厚/最小厚	mm	800/350
連接柱徑	mm	Φ160
頂出力	kN	285
頂出行程	mm	160
射出力	kN	208
射出行程	mm	230
射出柱塞直徑	mm	Φ80/Φ90/Φ100
噴嘴接嘴力	kN	51.4/最大72
噴嘴接嘴行程	mm	550
鑄造壓力	MPa	41.5/32.8/26.6
可鑄面積 (效率100%)	cm ²	2259
可鑄重量 (效率60%)	g	1480
常用壓力	MPa	14
電動機容量	kw	
操作電源容量	kVA	62
坩鍋容量	kg	870
油缸容量	L	700
機械重量	ton	28


CXMG-600

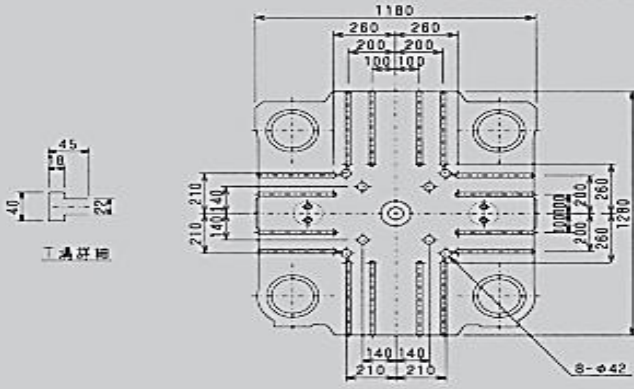

可動盤 MOVABLE PLATEN

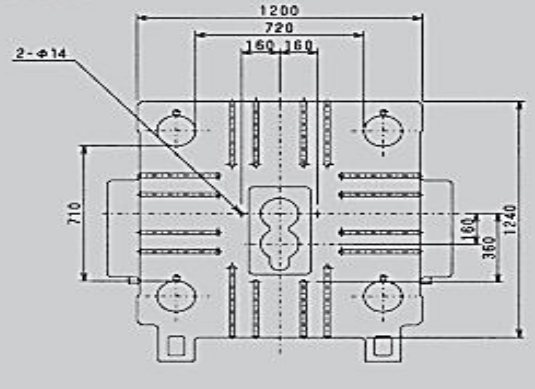

固定盤 FIXED PLATEN

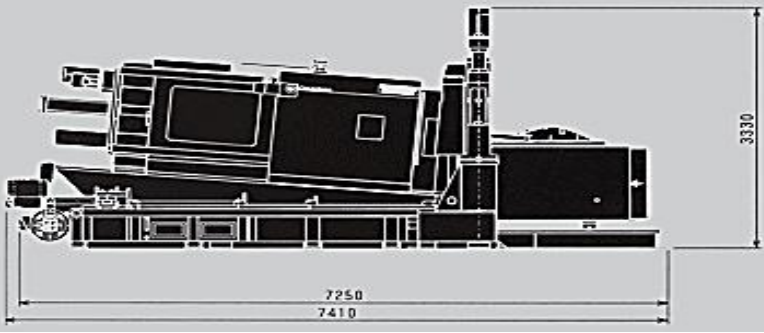

CXMG-60/150/250/350 (mm)

	CXMG-60	CXMG-150	CXMG-250	CXMG-350
[1]	488	720	870	950
[2]	330	460	530	600
[3]	65	100	125	150
[4]	58	85	110	125
[5]	4500	5000	5400	6675
[6]	2000	2550	2550	2570
[7]	2350	2520	2780	3100

