


Ds-250EX

Specifications

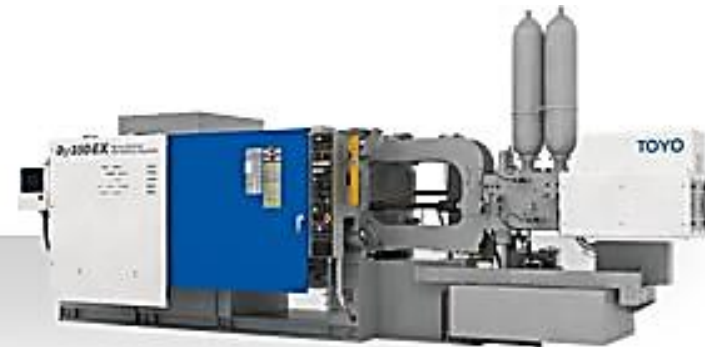

※ The photograph shows the Ds-350EX.

| Item | | Ds-250EX |
|--|-----|---|
| Injection system | - | Motor-driven servo + Hydraulic pressure |
| Clamping force | kN | 2500 |
| Tie-bar distance (H×W) | mm | 584 X 584 |
| Die stroke (Max. Min.) | mm | 380～250 |
| Die thickness (Max. Min.) | mm | 600～250 |
| Injection force | kN | 282 |
| Injection position | mm | -125 |
| Low injection speed (maximum 9 point setting) | m/s | 0.01～0.5 |
| High injection speed (maximum 5 point setting) | m/s | 0.5～8.0 |
| Ejection force | kN | 125 |