


# Ds-350EX

## Specifications

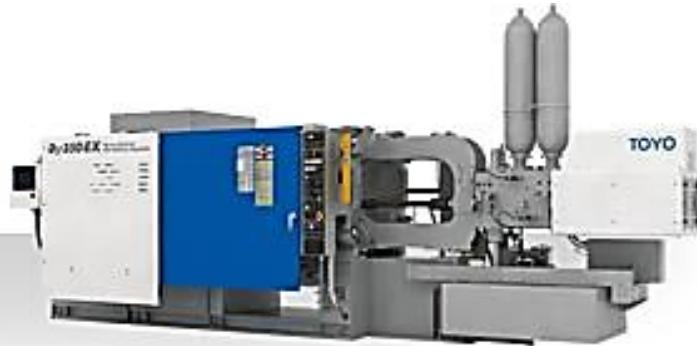

Item		Ds-350EX
Injection system	-	Motor-driven servo + Hydraulic pressure
Clamping force	kN	3500
Tie-bar distance (H×W)	mm	652 X 652
Die stroke (Max. Min.)	mm	420～300
Die thickness (Max. Min.)	mm	700～300
Injection force	kN	335
Injection position	mm	-150
Low injection speed (maximum 9 point setting)	m/s	0.01～0.5
High injection speed (maximum 5 point setting)	m/s	0.5～8.0
Ejection force	kN	190