


Ds-250EX

Specifications

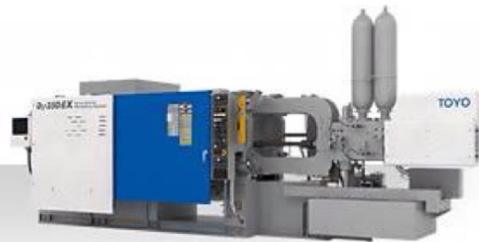

※ The photograph shows the Ds-350EX.

Item		Ds-250EX
Injection system	-	Motor-driven servo + Hydraulic pressure
Clamping force	kN	2500
Tie-bar distance (H×W)	mm	584 X 584
Die stroke (Max. Min.)	mm	380 ~ 250
Die thickness (Max. Min.)	mm	600 ~ 250
Injection force	kN	282
Injection position	mm	-125
Low injection speed (maximum 9 point setting)	m/s	0.01 ~ 0.5
High injection speed (maximum 5 point setting)	m/s	0.5 ~ 8.0
Ejection force	kN	125
Machine dimensions(L×W×H)	mm	5831 X 1851 X 2644