


# Ds-350EX

## Specifications

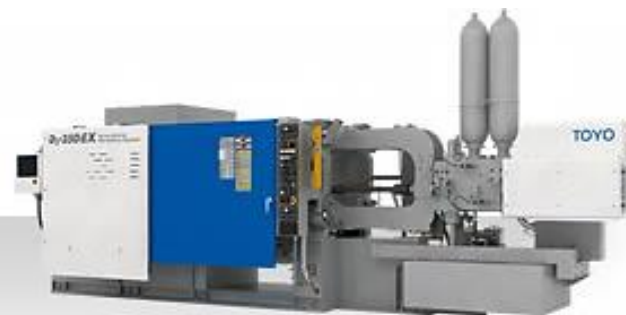

Item		Ds-350EX
Injection system	-	Motor-driven servo + Hydraulic pressure
Clamping force	kN	3500
Tie-bar distance (H×W)	mm	652 X 652
Die stroke (Max. Min.)	mm	420 ~ 300
Die thickness (Max. Min.)	mm	700 ~ 300
Injection force	kN	335
Injection position	mm	-150
Low injection speed (maximum 9 point setting)	m/s	0.01 ~ 0.5
High injection speed (maximum 5 point setting)	m/s	0.5 ~ 8.0
Ejection force	kN	190