


Ds-500EX

Specifications

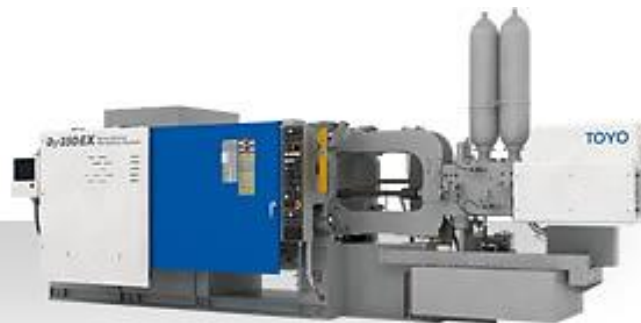

※ The photograph shows the Ds-350EX.

Item		Ds-500EX
Injection system	-	Motor-driven servo + Hydraulic pressure
Clamping force	kN	5000
Tie-bar distance (H×W)	mm	748 X 748
Die stroke (Max. Min.)	mm	560 ~ 400
Die thickness (Max. Min.)	mm	850 ~ 350
Injection force	kN	486
Injection position	mm	-175
Low injection speed (maximum 9 point setting)	m/s	0.01 ~ 0.5
High injection speed (maximum 5 point setting)	m/s	0.5 ~ 8.0
Ejection force	kN	251